




BNC系列产品是按MIL-C-39012和IEC 169—8详细规范研制生产的一种卡口式射频同轴连接器，具有连接迅速、接触可靠等特点，广泛适用于无线电设备和电子仪器领域连接射频同轴电缆。

主要技术特性


环境参数		电气性能	
温度范围	-65 ~ +165°C	特性阻抗	50 Ω, 75 Ω
材料与涂覆		工作电压	500V
		频率范围	0-4GHz
		介质耐压	1500V
		接触电阻	内导体: ≤1.5mΩ, 外导体: ≤1mΩ
		绝缘电阻	≥5000MΩ
		电压驻波比	≤1.30
机械性能	连接器耐久性: 500次		

界面尺寸

PLUG(mm)			JACK(mm)		
	最小值	最大值		最小值	最大值
A	9.78	9.91	A	10.97	11.07
B	—	—	B	9.60	9.70
C	4.83	—	C	8.31	8.46
D	5.33	5.84	D	8.10	8.15
E	5.28	5.79	E	—	6.50
F	0.15	0.46	F	—	4.72
G	0.08	1.02	G	8.31	8.51
H	—	0.64	H	4.78	5.28
J	1.32	1.37	J	4.72	5.23
K	2.06	2.21	K	5.18	5.28
L	1.98	—	L	1.91	2.06
			M	—	0.15
			N	2.06	2.21
			P	4.95	—


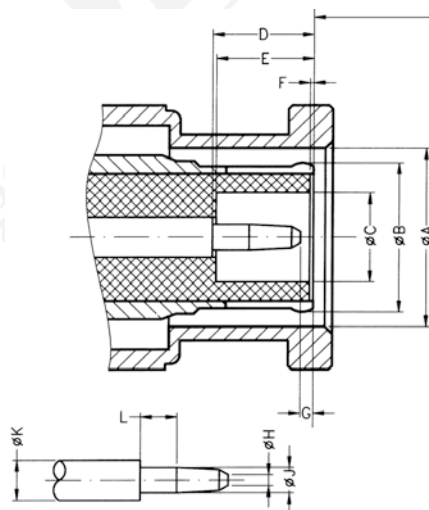


基准面

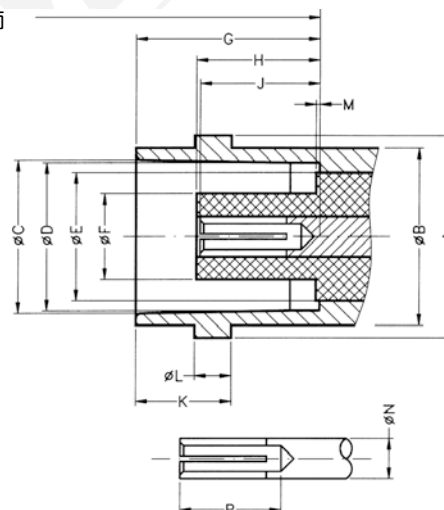


Unit:mm



1. 半刚电缆、半柔电缆连接器

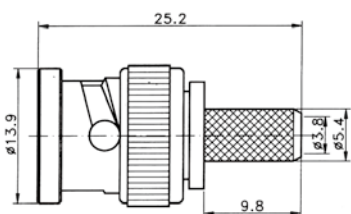



型 号	电缆组别	备 注
BNC-75J59Y	6/75S	

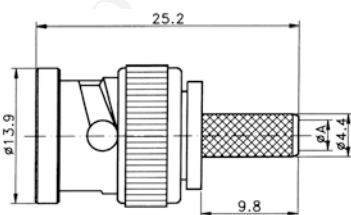


BNC-J5Y	5/50S	A=3.1
BNC-75J5Y	5/75S	A=3.1

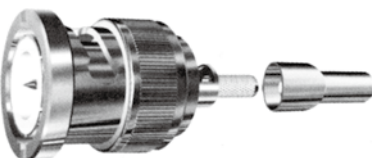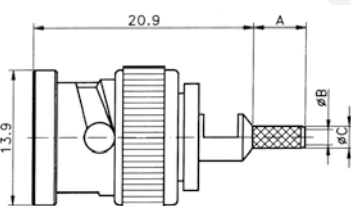


BNC-J2.5C	2.6/50S	A=5.3, B=1.6, C=2.3
BNC-J3C	3/50S	A=5.3, B=1.6, C=2.6
BNC-J4C	4/50S	A=6.7, B=2.3, C=3.4
BNC-J5C	5/50S	A=8.8, B=3.1, C=4.4
BNC-75J2C	2/75S	A=5.3, B=1.3, C=2.0
BNC-75J2.5C	2.6/75S	A=5.3, B=1.6, C=2.3
BNC-(E)75J3.5C	3/75D	A=6.7, B=2.1, C=3.0
BNC-75J4D	4/75D	A=6.7, B=2.1, C=3.4

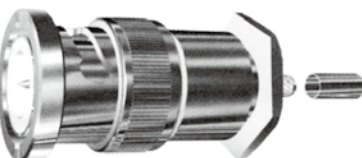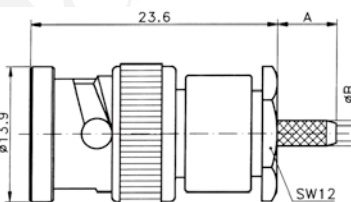

BNC-75J2.5YA	2.6/75S	A=6.0, B=1.6, C=2.3
BNC-75J3YA	3/75S	A=6.0, B=1.6, C=2.6
BNC-75J4YA	4/75S	A=6.0, B=2.1, C=3.4
BNC-75J5YA	5/75S	A=9.5, B=3.1, C=4.4

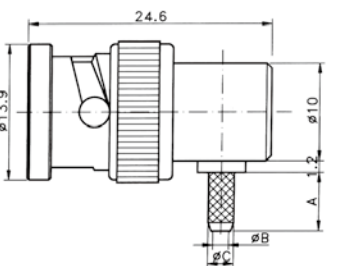


BNC-JW2.5YA	2.6/50S	A=6.0, B=1.6, C=2.3
BNC-JW3YA	3/50S	A=6.0, B=1.6, C=2.6
BNC-JW4YA	4/50S	A=7.0, B=2.3, C=3.4
BNC-JW5YA	5/50S	A=9.0, B=3.1, C=4.4
BNC-75JW2.5Y	2.6/75S	A=6.0, B=1.6, C=2.3
BNC-75JW3Y	3/75S	A=6.0, B=1.6, C=2.6
BNC-75JW4Y	4/75S	A=7.0, B=2.1, C=3.4
BNC-75JW5Y	5/75S	A=9.0, B=3.1, C=4.4


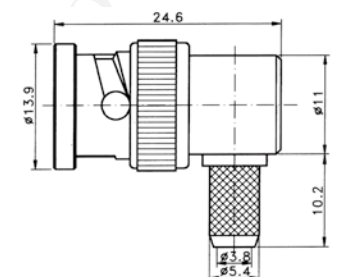


BNC-75JW59Y	6/75S	
-------------	-------	--



1. 半刚电缆、半柔电缆连接器

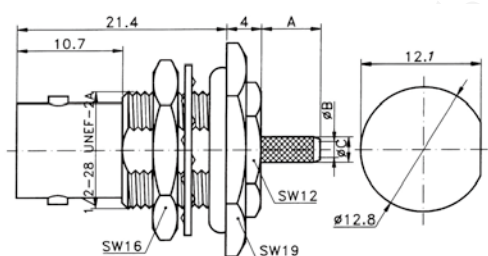



型 号	电缆组别	备 注
BNC-(E)KY2.5Y	2.6/50S	A=6.0,B=1.6,C=2.3
BNC-(E)KY2.5DY	2.6/50D	A=6.0,B=1.6,C=2.6
BNC-KY3Y	3/50S	A=6.0,B=1.6,C=2.6
BNC-KY4Y	4/50S	A=7.0,B=2.3,C=3.4
BNC-KY5Y	5/50S	A=9.0,B=3.1,C=4.4
BNC-75KY59Y	6/75S	A=9.0,B=3.8,C=5.4

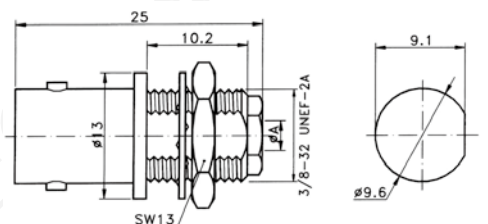

BNC-KY2.5	2.6/50S	A=2.7
BNC-KY3	3/50S	A=3.1

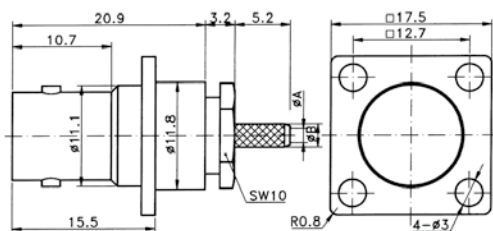


BNC-KF2.5Y	2.6/50S	A=1.6,B=2.3
BNC-KF2.5DY	2.6/50D	A=1.6,B=2.6
BNC-KF3Y	3/50S	A=1.6,B=2.6


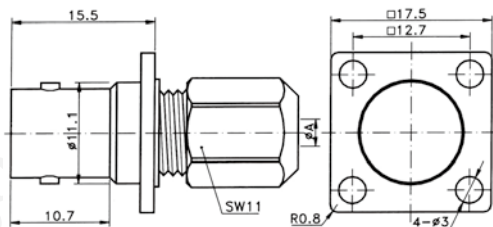


BNC-KF3	3/50S	A=3.0
BNC-KF4	4/50S	A=4.2
BNC-KF5	5/50S	A=5.3

2. 法兰安装式终端连接器

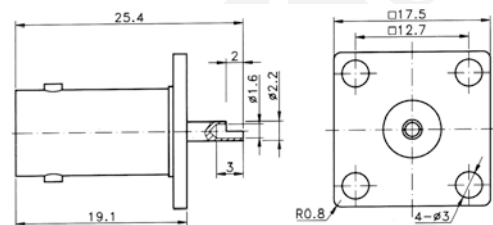



型 号	备 注
BNC-KFD10	

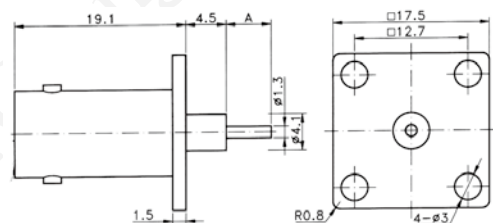

47-583-006	A=6.9
47-583-007	A=5.0




3. 系列内转接器

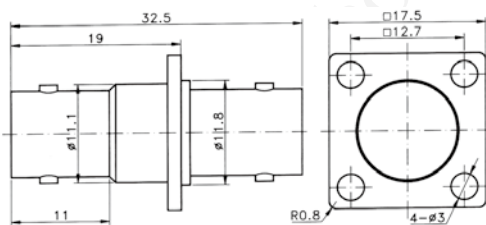


型 号

备 注

BNC-50KFK



BNC-50KK

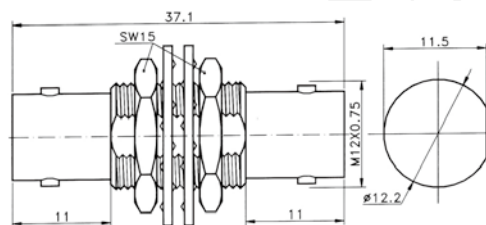

BNC-75KKY