





L9(1.6/5.6 75 Ω)系列产品是按照IEC 169-13、CECC 22240和DIN 47295生产的一种小型螺纹连接的同轴连接器，具有尺寸小、重量轻、机电性能俱佳的特点。供通讯设备和无线电仪器的高频回路中连接射频同轴电缆用。

主要技术特性


环境参数		电气性能	
温度范围	-40 ~ +85℃	特性阻抗	75 Ω
材料与涂覆		工作电压	330V
壳体	黄铜镀硬金	频率范围	0-1GHz
插针	黄铜镀硬金	介质耐压	1000V
插孔	镀青铜镀硬金	接触电阻	内导体: ≤10mΩ, 外导体: ≤5mΩ
绝缘体	聚四氟乙烯	绝缘电阻	≥10000MΩ
压接套	铜合金镀镍或金	机械性能	连接器耐久性: 500次

界面尺寸



PLUG(mm)			JACK(mm)		
	最小值	最大值		最小值	最大值
A	-	1.60	A	-	1.60
B	0.97	1.03	B	-	5.60
C	4.00	-	C	-	3.80
D	-	5.60	D	6.60	6.69
E	-	5.50	E	8.10	8.25
F	-	0.15	F	-	M9X0.5
G	6.40	6.60	G	0.25	-
			H	6.70	-
			J	2.90	3.10

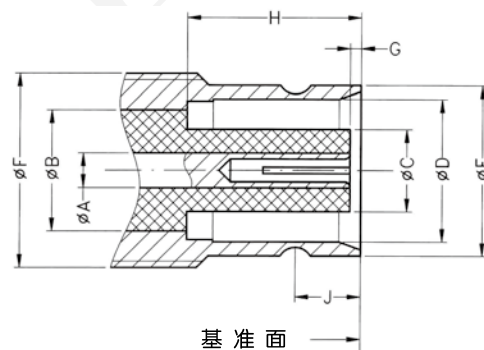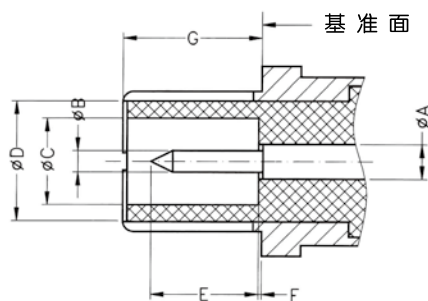


1. 软电缆连接器





型 号	电缆组别	备 注
L9-75J2.5	2.6/75S	A=10.8
L9-75J3	3/75S	A=10.8
L9-75J4	4/75S	A=10.8
L9-75J4D	4/75D	A=10.8
L9-75J5	5/75S	A=10.8
L9-75J2.5A	2.6/75S	A=10.5
L9-75J3A	3/75S	A=10.5
L9-75J4A	4/75S	A=10.5
L9-75J4DA	4/75D	A=10.5
L9-75J5A	5/75S	A=10.5



L9-75JW2.5Y	2.5/75S	A=6.0, B=1.6, C=2.3
L9-75JW3Y	3/75S	A=7.0, B=1.6, C=2.6
L9-75JW4Y	4/75S	A=8.0, B=2.1, C=3.4
L9-75JW5Y	5/75S	A=10.0, B=3.1, C=4.4


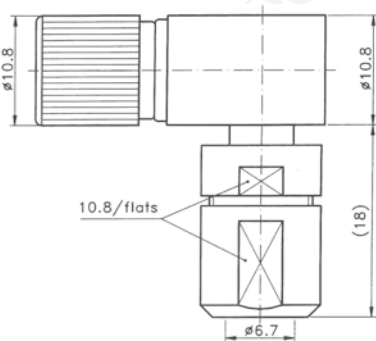


L9-75JW6.5	6/75S	
------------	-------	--

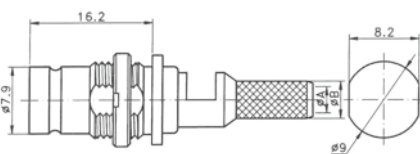


L9-75KY2.5Y	2.5/75S	A=1.6, B=2.3
L9-75KY3Y	3/75S	A=1.6, B=2.6
L9-75KY4Y	4/75S	A=2.1, B=3.4
L9-75KY5Y	5/75S	A=3.1, B=4.4

2. 系列内转接器




型 号	备 注
L9-75KYK	



L9-75KYKA	
-----------	--


2. 系列内转接器

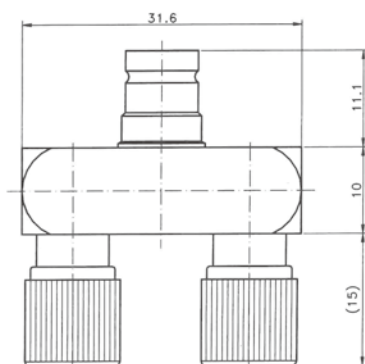

型 号

备 注

L9-75KYK



L9-75KYK