

SAA(1.0 / 2.3)系列产品是按照CECC 22230和DIN 47297的要求生产的一种直插锁紧式同轴连接器，具有体积小、重量轻、使用方便、可靠性高等特点，多用于要求插拔迅速、又对连接可靠性有较高要求的通信及数



主要技术特性

环境参数		电气性能	
温度范围	-65 ~ +155°C	特性阻抗	50 Ω, 75 Ω
材料与涂覆		工作电压	250V
壳体	黄铜镀硬金	频率范围	0~4.8GHz(50 Ω), 0~1.65GHz(75 Ω)
弹性接触件	铍青铜镀硬金	介质耐压	750V
插针	黄铜镀硬金	接触电阻	内导体: ≤10mΩ, 外导体: ≤7.5 Ω
插孔	铍青铜镀硬金	绝缘电阻	≥1000MΩ
绝缘体	聚四氟乙烯	电压驻波比	直式: ≤1.25, 弯式: ≤1.40
压接套	铜合金镀镍	机械性能	连接器耐久性: 500次


界面尺寸

PLUG(mm)		
	最小值	最大值
A	-	-
B	2.30	2.35
C	-	1.15
D	0.10	0.50
E	5.40	5.70
F	0.49	0.52
G	0.97	1.00
H	4.20	4.30
J	5.30	5.50

JACK(mm)		
	最小值	最大值
A	4.03	4.15
B	3.53	3.60
C	3.00	3.06
D	1.15	1.75
E	1.80	1.90
F	5.80	5.90
G	6.40	6.50
H	0.50	0.60
J	4.45	4.55
K	0.97	1.00
L	-	-

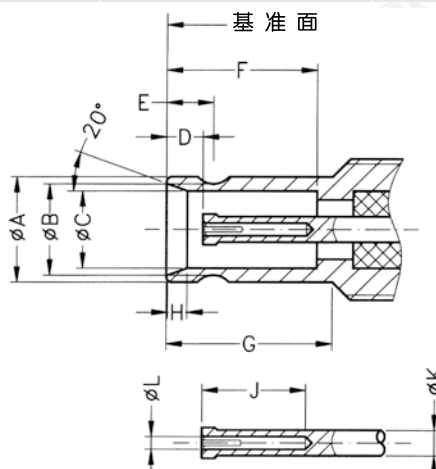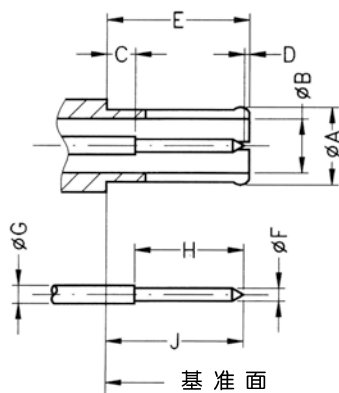



1. 半刚电缆、半柔电缆连接器




型 号	电缆组别	备 注
SAA-JB2	085	
SAA-JB3	141	





1. 半刚电缆、半柔电缆连接器



型 号	电缆组别	备 注
SAA-JWB2	085	
SAA-JWB3	141	




SAA-KYB2	085	
SAA-KYB3	141	





SAA-KYWB2	085	
SAA-KYWB3	141	


2. 软电缆连接器

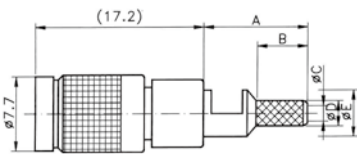



SAA-75J2C	2/75S	A=10.7, B=5.3, C=1.0, D=2.0, E=4.8
SAA-75J2.5C	2.6/75S	A=10.7, B=5.3, C=1.6, D=2.3, E=4.8
SAA-75J3C	3/75S	A=10.7, B=5.3, C=1.6, D=2.6, E=4.8
SAA-75J4C	4/75S	A=12.2, B=6.7, C=2.1, D=3.4, E=4.8
SAA-75J5C	5/75S	A=14.2, B=8.8, C=3.1, D=4.4, E=5.4

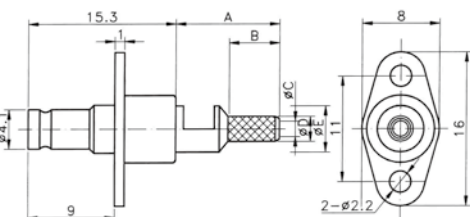



SAA-75KF2C	2/75S	A=10.7, B=5.3, C=1.0, D=2.0, E=4.8
SAA-75KF2.5C	2.6/75S	A=10.7, B=5.3, C=1.6, D=2.3, E=4.8
SAA-75KF3C	3/75S	A=10.7, B=5.3, C=1.6, D=2.6, E=4.8
SAA-75KF4C	4/75S	A=12.2, B=6.7, C=2.1, D=3.4, E=4.8
SAA-75KF5C	5/75S	A=14.2, B=8.8, C=3.1, D=4.4, E=5.4



SAA-75J2.5	2.6/75S	A=1.6, B=2.3
SAA-75J3	3/75S	A=1.6, B=2.6
SAA-75J4	4/75S	A=2.1, B=3.4




SAA-75JW2	2/75S	A=5.3, B=1.0, C=2.0
SAA-75JW2.5	2.6/75S	A=5.3, B=1.6, C=2.3
SAA-75JW3	3/75S	A=5.3, B=1.6, C=2.6
SAA-75JW4	4/75S	A=6.7, B=2.1, C=3.4
SAA-75JW5	5/75S	A=8.8, B=3.1, C=4.4

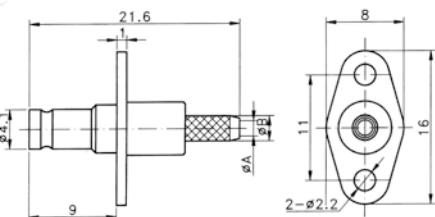


SAA-75KF2.5	2.6/75S	A=1.6, B=2.3
SAA-75KF3	3/75S	A=1.6, B=2.6

2. 软电缆连接器




型 号	电缆组别	备 注
SAA-75KY2.5	2.6/75S	A=5.3,B=1.6,C=2.3
SAA-75KY3	3/75S	A=5.3,B=1.6,C=2.6
SAA-75KY4	4/75S	A=6.7,B=2.1,C=3.4
SAA-75KY5	5/75S	A=8.8,B=3.1,C=4.4


3. 印刷电路板连接器

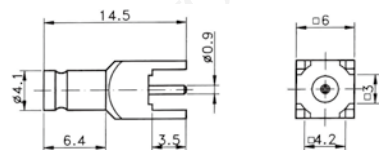



型 号	备 注
SAA-KHD	

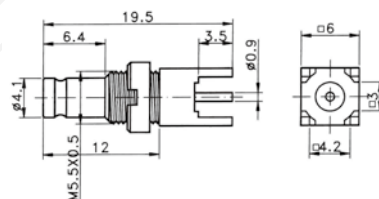



SAA-KYHD	
----------	--

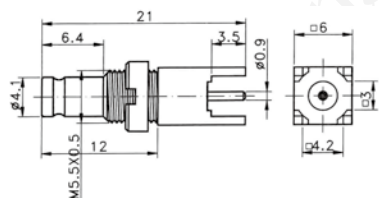



SAA-KYHD1	
SAA-KYHD2	不装螺母

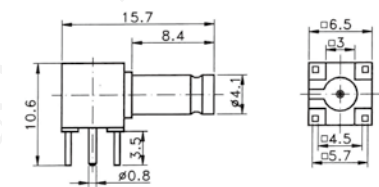

SAA-KWHD	
----------	--

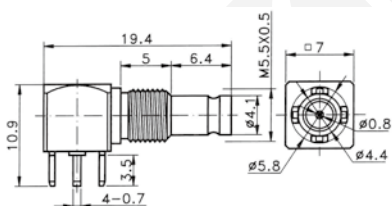

SAA-KYWH	
----------	--

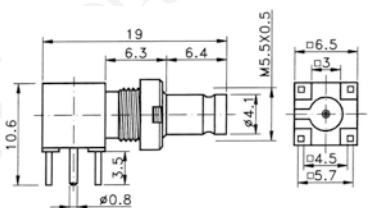

SAA-KYWH1	
SAA-KYWH2	不装螺母