

■ 技术参数 TECHNICAL PARAMETR





1. 间距 Pitch: 1.00mm
2. 额定电流 Current Rating: 1.0A AC/DC.
3. 额定电压 Voltage Rating: 200V AC/DC.
4. 温度范围 Temperature range: -25°C~+85°C
5. 耐压 Withstand Voltage: 500V/min
6. 接触电阻 Contact resistance: $\leq 40\text{m}\Omega$
7. 绝缘电阻 Insulation resistance: $\geq 100\text{M}\Omega$
8. 适用电线 Applicable wire: AWG#36~#28

■ A1006T (Crimp Terminal)

Reference Informations:

*Used in CG A1006 series Housing

*Tolerance:(unit:mm).0 ± 0.30 /.0 ± 0.20 /.0 ± 0.10 / $\pm 3.0^\circ\text{C}$

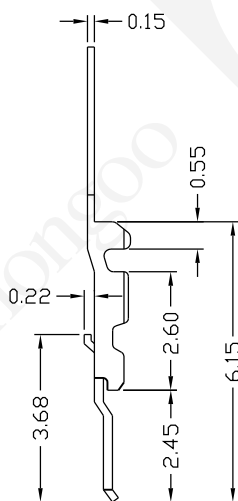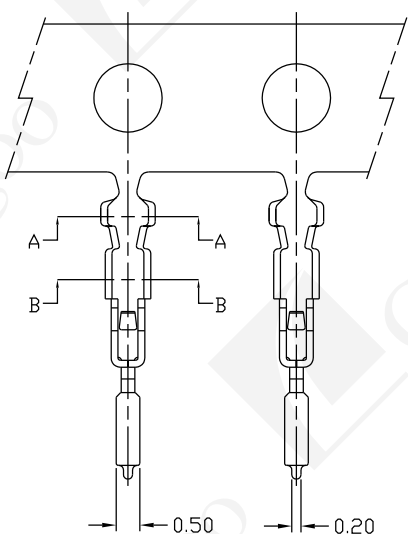

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
A1006T-PC-Z	AWG #28~#36	0.50mm(max)	Phosphor bronze	Gold-plated	

■ A1006Y


Reference Informations:

*Material:

Shell: Copper Alloy/Tin-plated


Insulator: PA66(UL94V-0)

*Suitable CG A1006T series Terminal

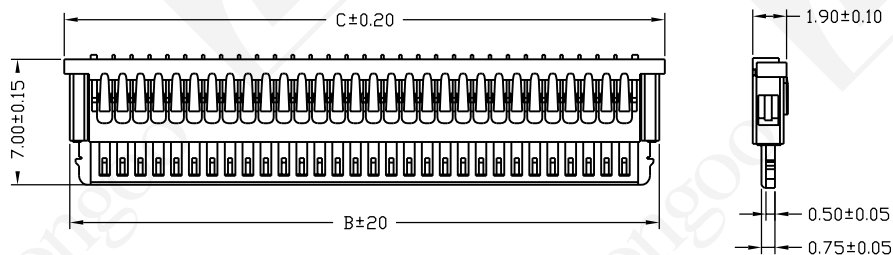

■ Ordering Information & Dimensions

PART No.	A	B	C
A1006Y-14P	13.00	15.96	17.50
A1006Y-20P	19.00	21.96	23.50
A1006Y-30P	29.00	31.96	33.50

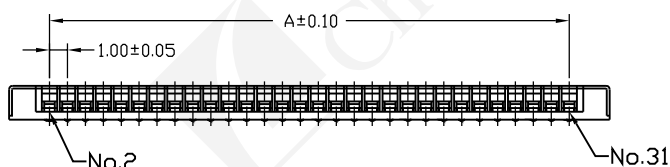

Unit:mm