


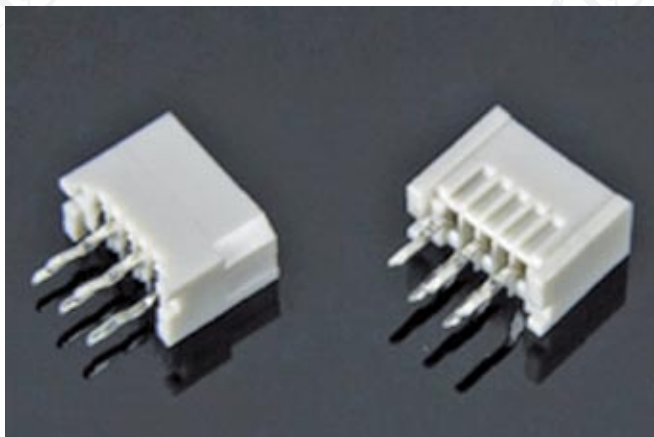


■ 技术参数 TECHNICAL PARAMETR

- 1.间距 Pitch: 1.25mm
- 2.额定电流 Current Rating: 1.0A AC/DC.
- 3.额定电压 Voltage Rating: 125V AC/DC.
- 4.温度范围 Temperature range: -40°C~+85°C
- 5.耐压 Withstand Voltage: 500V/min
- 6.接触电阻 Contact resistance: $\leq 0.03\Omega$
- 7.绝缘电阻 Insulation resistance: $\geq 800M\Omega$
- 8.适用印刷电路板厚度 Applicable PC board thickness: 0.8~1.6mm

■ 材料 Material


1. 外壳 Housing: PBT UL94V-0
2. 接触片 Contact: Phosphor bronze, Copper & Tin plating

■ 立式 (DIP) Top entry type

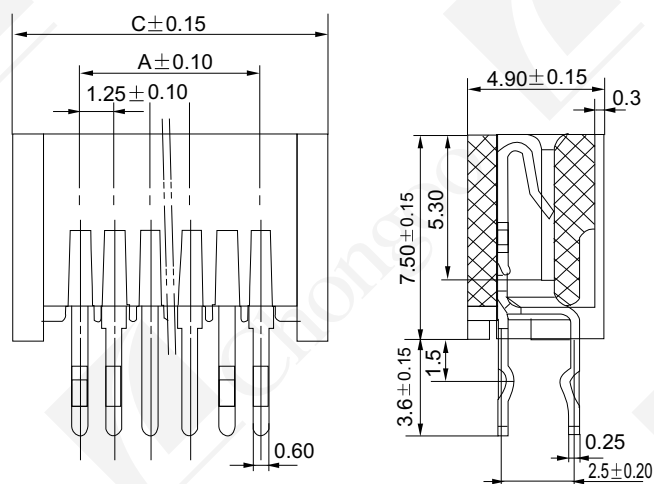


■ 装配图


Assembly diagram

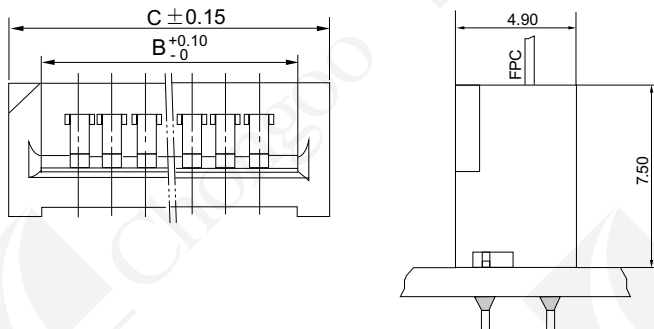

■ 印刷电路板 PC board layout

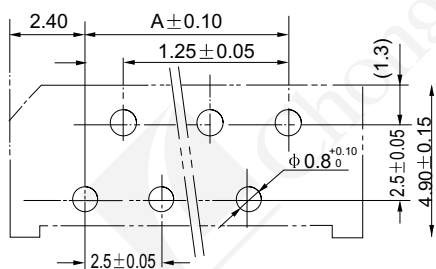

■ 适用FFC/FPC Applicable FFC/FPC



■ 编号与尺寸

Ordering Informftion & Dimensions

PART No.	A	B	C	PART No.	A	B	C	PART No.	A	B	C
FPC1.25A-4P	3.75	6.25	8.55	FPC1.25A-15P	17.50	20.00	22.30	FPC1.25A-26P	31.25	33.75	36.05
FPC1.25A-5P	5.00	7.50	9.80	FPC1.25A-16P	18.75	21.25	23.55	FPC1.25A-27P	32.50	35.00	37.30
FPC1.25A-6P	6.25	8.75	11.05	FPC1.25A-17P	20.00	22.50	24.80	FPC1.25A-28P	33.75	36.25	38.55
FPC1.25A-7P	7.50	10.00	12.30	FPC1.25A-18P	21.25	23.75	26.05	FPC1.25A-29P	35.00	37.50	39.80
FPC1.25A-8P	8.75	11.25	13.55	FPC1.25A-19P	22.50	25.00	27.30	FPC1.25A-30P	36.25	38.75	41.05
FPC1.25A-9P	10.00	12.50	14.80	FPC1.25A-20P	23.75	26.25	28.55	FPC1.25A-31P	37.50	40.00	42.30
FPC1.25A-10P	11.25	13.75	16.05	FPC1.25A-21P	25.00	27.50	29.80	FPC1.25A-32P	38.75	41.25	43.55
FPC1.25A-11P	12.50	15.00	17.30	FPC1.25A-22P	26.25	28.75	31.05	FPC1.25A-33P	40.00	42.50	44.80
FPC1.25A-12P	13.75	16.25	18.55	FPC1.25A-23P	27.50	30.00	32.30	FPC1.25A-34P	41.25	43.75	46.05
FPC1.25A-13P	15.00	17.50	19.80	FPC1.25A-24P	28.75	31.25	33.55	FPC1.25A-35P	42.50	45.00	47.30
FPC1.25A-14P	16.25	18.75	21.05	FPC1.25A-25P	30.00	32.50	34.80				

Unit:mm