



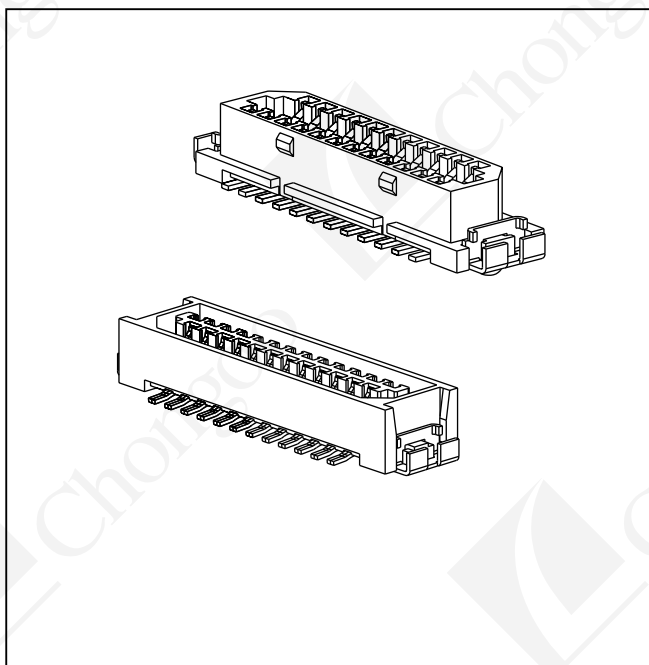

■ 技术参数 TECHNICAL PARAMETR

- 1.间距 Pitch: 1.00mm
- 2.额定电流 Current Rating: 0.5A AC/DC.
- 3.额定电压 Voltage Rating: 150V AC/DC.
- 4.温度范围 Temperature range: -25°C~+85°C
- 5.耐压 Withstand Voltage: 150V/min
- 6.接触电阻 Contact resistance: $\leq 50\text{m}\Omega$
- 7.绝缘电阻 Insulation resistance: $\geq 500\text{M}\Omega$

■ 安装图 Assembly layout

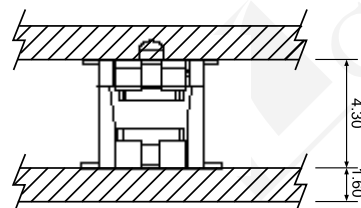

■ B1001G (Housing SMT)

Refelence Infolmations:






*Material:

Pin:Phosphor Bronze/Tin-plated

Solder Tab:Phosphor Bronze/Tin-plated

Insulator:PA46 (UL94V-0)

*Mates With CG B1001M Series Wafer

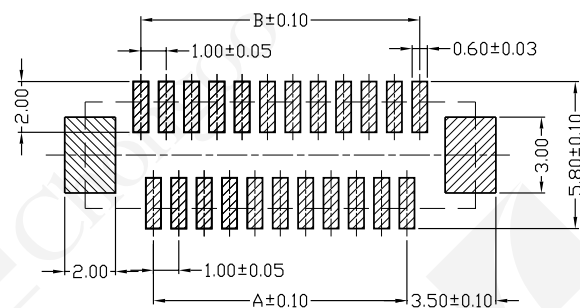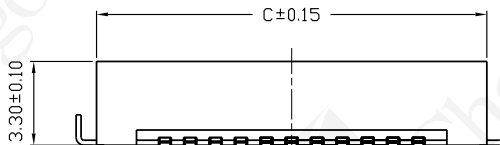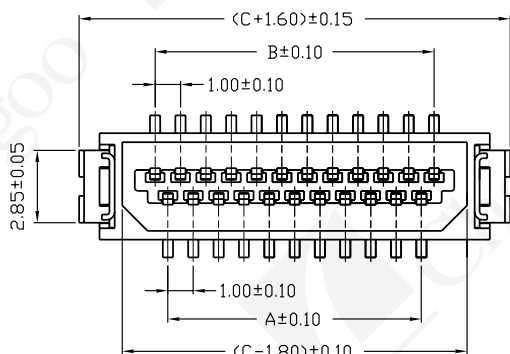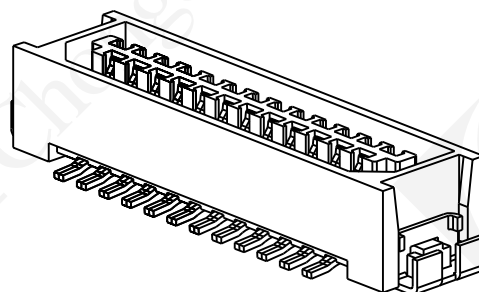

P.C.B Layout

■ Ordering Informftion & Dimensions

PART No.	A	B	C	PART No.	A	B	C
B1001G-5P	1.00	2.00	6.40	B1001G-29P	13.00	14.00	18.40
B1001G-7P	2.00	3.00	7.40	B1001G-31P	14.00	15.00	19.40
B1001G-9P	3.00	4.00	8.40	B1001G-33P	15.00	16.00	20.40
B1001G-11P	4.00	5.00	9.40	B1001G-35P	16.00	17.00	21.40
B1001G-13P	5.00	6.00	10.40	B1001G-37P	17.00	18.00	22.40
B1001G-15P	6.00	7.00	11.40	B1001G-39P	18.00	19.00	23.40
B1001G-17P	7.00	8.00	12.40	B1001G-41P	19.00	20.00	24.40
B1001G-19P	8.00	9.00	13.40	B1001G-43P	20.00	21.00	25.40
B1001G-21P	9.00	10.00	14.40	B1001G-45P	21.00	22.00	26.40
B1001G-23P	10.00	11.00	15.40	B1001G-47P	22.00	23.00	27.40
B1001G-25P	11.00	12.00	16.40	B1001G-49P	23.00	24.00	28.40
B1001G-27P	12.00	13.00	17.40				

Unit:mm

■ B1001M (Housing SMT)

Reference Informations:






*Material:

Pin: Phosphor Bronze/Tin-plated

Solder Tab: Phosphor Bronze/Tin-plated

Insulator: PA46 (UL94V-0)

*Mates With CG B1001G Series Wafer

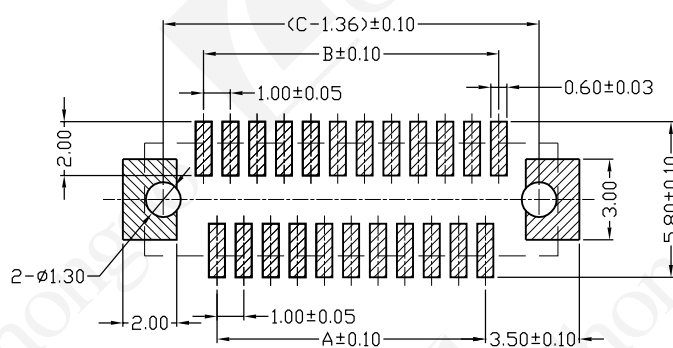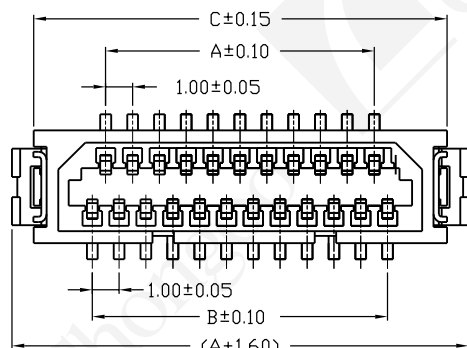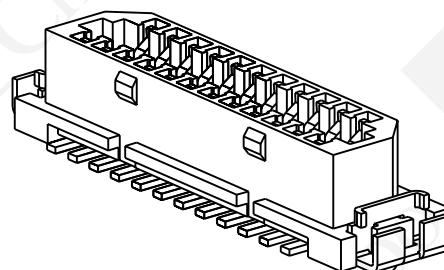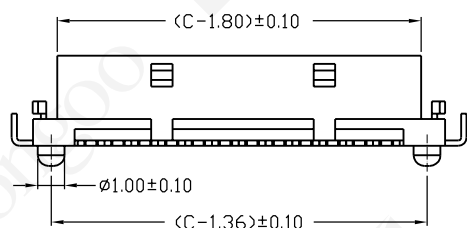

P.C.B Layout

■ Ordering Information & Dimensions

PART No.	A	B	C	PART No.	A	B	C
B1001M-5P	1.00	2.00	6.40	B1001M-29P	13.00	14.00	18.40
B1001M-7P	2.00	3.00	7.40	B1001M-31P	14.00	15.00	19.40
B1001M-9P	3.00	4.00	8.40	B1001M-33P	15.00	16.00	20.40
B1001M-11P	4.00	5.00	9.40	B1001M-35P	16.00	17.00	21.40
B1001M-13P	5.00	6.00	10.40	B1001M-37P	17.00	18.00	22.40
B1001M-15P	6.00	7.00	11.40	B1001M-39P	18.00	19.00	23.40
B1001M-17P	7.00	8.00	12.40	B1001M-41P	19.00	20.00	24.40
B1001M-19P	8.00	9.00	13.40	B1001M-43P	20.00	21.00	25.40
B1001M-21P	9.00	10.00	14.40	B1001M-45P	21.00	22.00	26.40
B1001M-23P	10.00	11.00	15.40	B1001M-47P	22.00	23.00	27.40
B1001M-25P	11.00	12.00	16.40	B1001M-49P	23.00	24.00	28.40
B1001M-27P	12.00	13.00	17.40				