


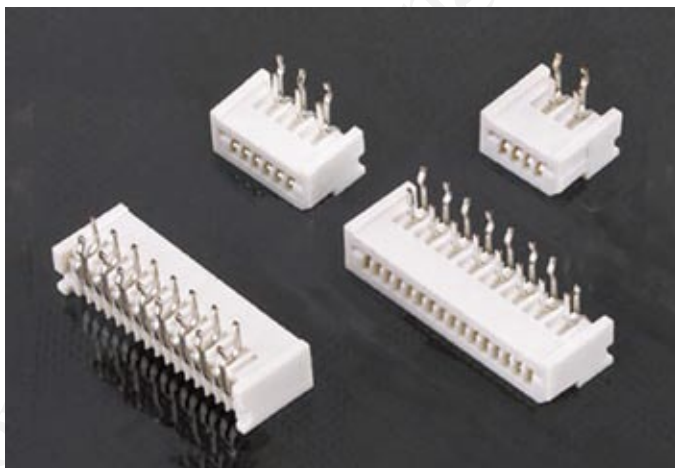




■ 技术参数 TECHNICAL PARAMETR

1. 间距 Pitch: 1.25mm
2. 额定电流 Current Rating: 1.0A AC/DC.
3. 额定电压 Voltage Rating: 125V AC/DC.
4. 温度范围 Temperature range: -40°C~+85°C
5. 耐压 Withstand Voltage: 500V/min
6. 接触电阻 Contact resistance: $\leq 0.03\Omega$
7. 绝缘电阻 Insulation resistance: $\geq 800M\Omega$
8. 适用印刷电路板厚度 Applicable PC board thickness: 0.8~1.6mm


■ 材料 Material

1. 外壳 Housing: PBT UL94V-0
2. 接触片 Contact: Phosphor bronze, Copper & Tin plating


■ 卧式上接触 Side entry Top contact

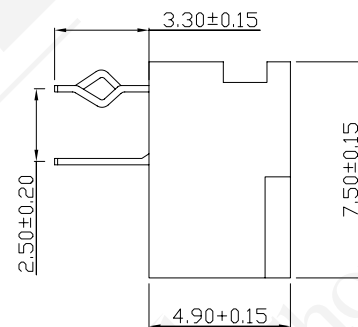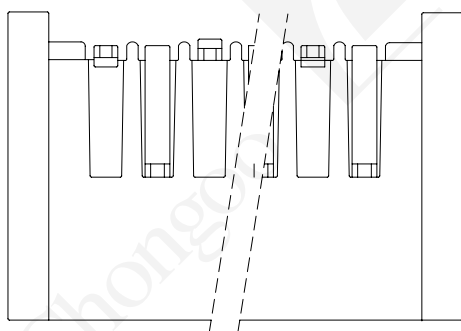


■ 装配图 Assembly diagram

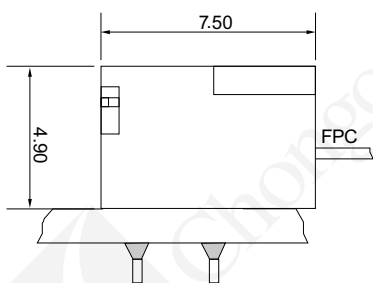

■ 适用FFC/FPC Applicable FFC/FPC

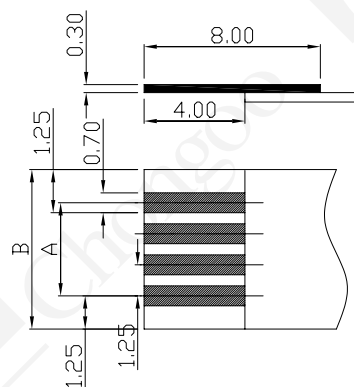

■ 印刷电路板 PC board layout

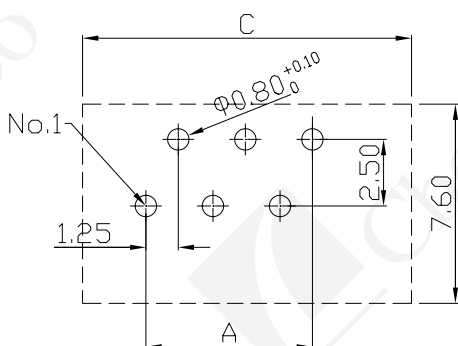

■ 编号与尺寸

Ordering Informtion & Dimensions

PART No.	A	B	C	PART No.	A	B	C	PART No.	A	B	C
FPC1.25B-4P	3.75	6.25	8.55	FPC1.25B-15P	17.50	20.00	22.30	FPC1.25B-26P	31.25	33.75	36.05
FPC1.25B-5P	5.00	7.50	9.80	FPC1.25B-16P	18.75	21.25	23.55	FPC1.25B-27P	32.50	35.00	37.30
FPC1.25B-6P	6.25	8.75	11.05	FPC1.25B-17P	20.00	22.50	24.80	FPC1.25B-28P	33.75	36.25	38.55
FPC1.25B-7P	7.50	10.00	12.30	FPC1.25B-18P	21.25	23.75	26.05	FPC1.25B-29P	35.00	37.50	39.80
FPC1.25B-8P	8.75	11.25	13.55	FPC1.25B-19P	22.50	25.00	27.30	FPC1.25B-30P	36.25	38.75	41.05
FPC1.25B-9P	10.00	12.50	14.80	FPC1.25B-20P	23.75	26.25	28.55	FPC1.25B-31P	37.50	40.00	42.30
FPC1.25B-10P	11.25	13.75	16.05	FPC1.25B-21P	25.00	27.50	29.80	FPC1.25B-32P	38.75	41.25	43.55
FPC1.25B-11P	12.50	15.00	17.30	FPC1.25B-22P	26.25	28.75	31.05	FPC1.25B-33P	40.00	42.50	44.80
FPC1.25B-12P	13.75	16.25	18.55	FPC1.25B-23P	27.50	30.00	32.30	FPC1.25B-34P	41.25	43.75	46.05
FPC1.25B-13P	15.00	17.50	19.80	FPC1.25B-24P	28.75	31.25	33.55	FPC1.25B-35P	42.50	45.00	47.30
FPC1.25B-14P	16.25	18.75	21.05	FPC1.25B-25P	30.00	32.50	34.80				