


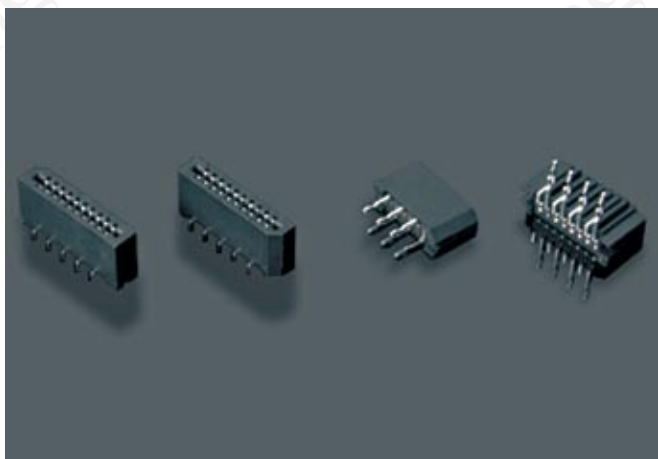


■ 技术参数 TECHNICAL PARAMETR

- 1.间距 Pitch: 1.0mm
- 2.额定电流 Current Rating: 0.5A AC/DC.
- 3.额定电压 Voltage Rating: 50V AC/DC.
- 4.温度范围 Temperature range: -25°C~+85°C
- 5.耐压 Withstand Voltage: 500V/min
- 6.接触电阻 Contact resistance: $\leq 0.02\Omega$
- 7.绝缘电阻 Insulation resistance: $\geq 800M\Omega$
- 8.适用印刷电路板厚度 Applicable PC board thickness: 0.8~1.6mm


■ 材料 Material

- 1.外壳 Housing: Nylon46/6T UL94V-0
- 2.接触片 Contact: Phosphor bronze/Tin plating


■ 安装图 Assembly layout

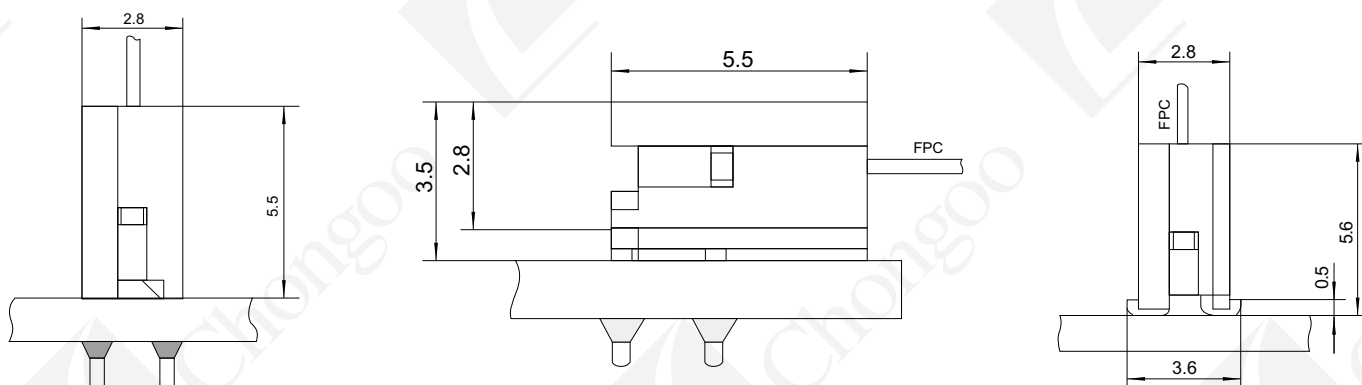

■ 立式 Top Entry Dual Contact

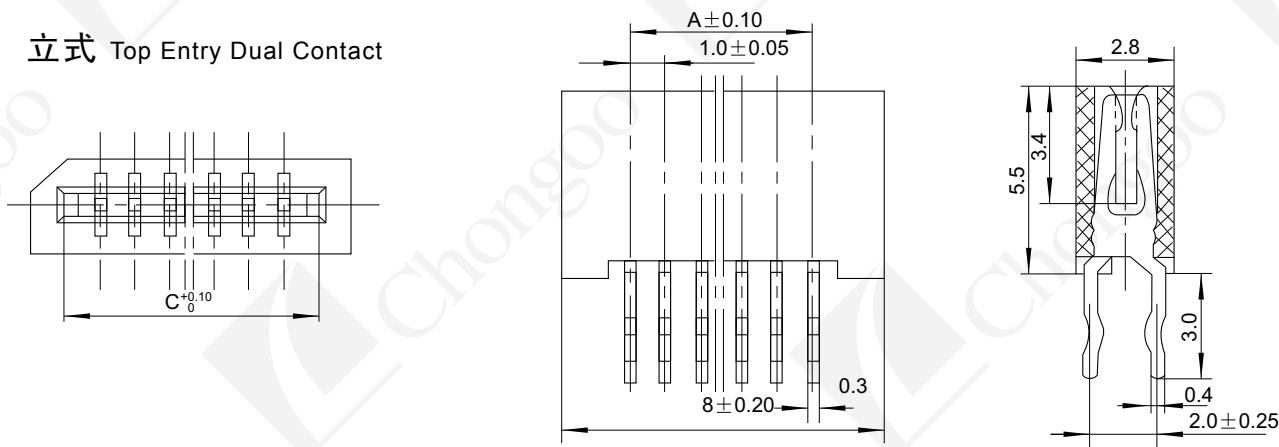

■ 印刷电路板 PC board layout

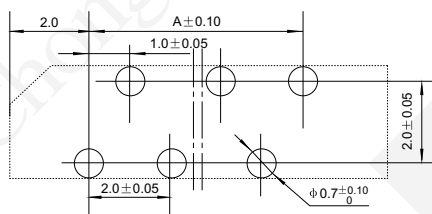




■ 编号与尺寸

Ordering Informftion & Dimensions


PART No.	A	B	C	PART No.	A	B	C	PART No.	A	B	C
FPC1.0H-3Pt	2.00	6.00	4.10	FPC1.0H-10Pt	9.00	13.00	11.10	FPC1.0H-17Pt	16.00	20.00	18.10
FPC1.0H-4Pt	3.00	7.00	5.10	FPC1.0H-11Pt	10.00	14.00	12.10	FPC1.0H-18Pt	17.00	21.00	19.10
FPC1.0H-5Pt	4.00	8.00	6.10	FPC1.0H-12Pt	11.00	15.00	13.10	FPC1.0H-19Pt	18.00	22.00	20.10
FPC1.0H-6Pt	5.00	9.00	7.10	FPC1.0H-13Pt	12.00	16.00	14.10	FPC1.0H-20Pt	19.00	23.00	21.10
FPC1.0H-7Pt	6.00	10.00	8.10	FPC1.0H-14Pt	13.00	17.00	15.10	FPC1.0H-25Pt	24.00	28.00	26.10
FPC1.0H-8Pt	7.00	11.00	9.10	FPC1.0H-15Pt	14.00	18.00	16.10	FPC1.0H-30Pt	29.00	33.00	31.10
FPC1.0H-9Pt	8.00	12.00	10.10	FPC1.0H-16Pt	15.00	19.00	17.10	FPC1.0H-35Pt	34.00	38.00	36.10



90°弯式 Sild Entry Dual Contact

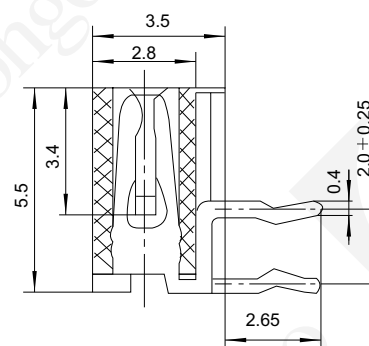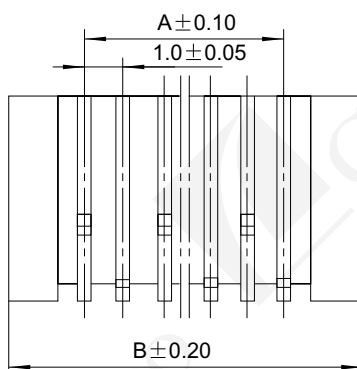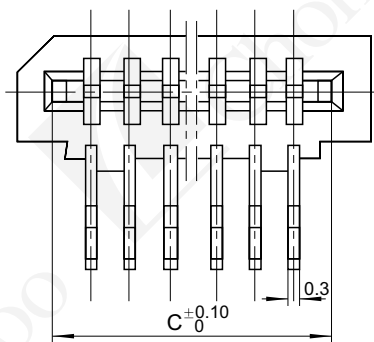

印刷电路板 PC board layout



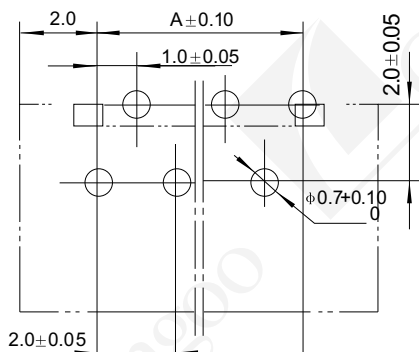


编号与尺寸


Ordering Informftion & Dimensions

PART No.	A	B	C	PART No.	A	B	C	PART No.	A	B	C
FPC1.0H-3Pr	2.00	6.00	4.10	FPC1.0H-10Pr	9.00	13.00	11.10	FPC1.0H-17Pr	16.00	20.00	18.10
FPC1.0H-4Pr	3.00	7.00	5.10	FPC1.0H-11Pr	10.00	14.00	12.10	FPC1.0H-18Pr	17.00	21.00	19.10
FPC1.0H-5Pr	4.00	8.00	6.10	FPC1.0H-12Pr	11.00	15.00	13.10	FPC1.0H-19Pr	18.00	22.00	20.10
FPC1.0H-6Pr	5.00	9.00	7.10	FPC1.0H-13Pr	12.00	16.00	14.10	FPC1.0H-20Pr	19.00	23.00	21.10
FPC1.0H-7Pr	6.00	10.00	8.10	FPC1.0H-14Pr	13.00	17.00	15.10	FPC1.0H-25Pr	24.00	28.00	26.10
FPC1.0H-8Pr	7.00	11.00	9.10	FPC1.0H-15Pr	14.00	18.00	16.10	FPC1.0H-30Pr	29.00	33.00	31.10
FPC1.0H-9Pr	8.00	12.00	10.10	FPC1.0H-16Pr	15.00	19.00	17.10	FPC1.0H-35Pr	34.00	38.00	36.10

立式 (SMT) Top Entry Dual Contact

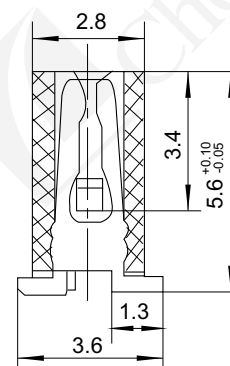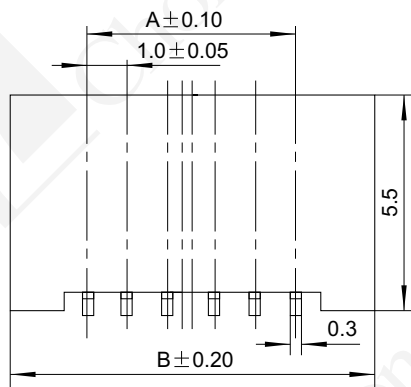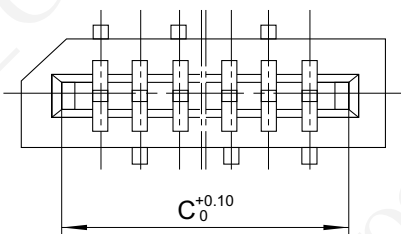

印刷电路板 PC board layout

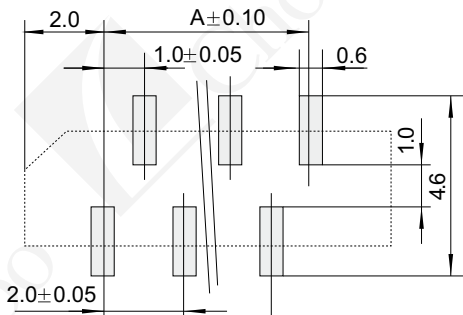

编号与尺寸

Ordering Informftion & Dimensions

PART No.	A	B	C	PART No.	A	B	C	PART No.	A	B	C
FPC1.0H-3Ps	2.00	6.00	4.10	FPC1.0H-10Ps	9.00	13.00	11.10	FPC1.0H-17Ps	16.00	20.00	18.10
FPC1.0H-4Ps	3.00	7.00	5.10	FPC1.0H-11Ps	10.00	14.00	12.10	FPC1.0H-18Ps	17.00	21.00	19.10
FPC1.0H-5Ps	4.00	8.00	6.10	FPC1.0H-12Ps	11.00	15.00	13.10	FPC1.0H-19Ps	18.00	22.00	20.10
FPC1.0H-6Ps	5.00	9.00	7.10	FPC1.0H-13Ps	12.00	16.00	14.10	FPC1.0H-20Ps	19.00	23.00	21.10
FPC1.0H-7Ps	6.00	10.00	8.10	FPC1.0H-14Ps	13.00	17.00	15.10	FPC1.0H-25Ps	24.00	28.00	26.10
FPC1.0H-8Ps	7.00	11.00	9.10	FPC1.0H-15Ps	14.00	18.00	16.10	FPC1.0H-30Ps	29.00	33.00	31.10
FPC1.0H-9Ps	8.00	12.00	10.10	FPC1.0H-16Ps	15.00	19.00	17.10	FPC1.0H-35Ps	34.00	38.00	36.10

适用FFC/FPC Applicable FFC/FPC

